

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project :		
Model #:		
Item #:	Qty:	
Available W/H:		
Approval:		

Swing Door Merchandiser

Glass Door Merchandisers Refrigerators

Model: TGM-14RV-N6

___ FEATURES & BENEFITS =__

■ Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet the new standards of the EPA and DOE in 2017. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low- emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- LED lighting interior
- Refrigerator holds 33°F ~ 38°F for the best in beverage preservation















Model	Swing Door	CU./FT.	#of Shelves	НР	AMPS	Crated Weight (lbs.)	L x D*x H (inches)
TGM-14RV-N6	1	12.1	Top: 3 Bottom: 1	1/5	2.2	187	235/8 x 233/8 x 735/8

(unit: inch)

Swing Door Merchandiser

Model: TGM-14RV-N6

ELECTRICAL DATA					
Voltage		115/60/1			
Plug Type		(i) NEMA 5-15P			
Full Load Am	peres	2.2			
Compressor I	HP	1/5			
Cord Length	(ft.)	7			
Refrigerant		R-600a			
DIMENSIONAL DATA					
# of Doors		1			
Net Capacity	(cu. ft.)	12.1			
Ext. Length C	verall (in.)	235/8 (600mm)			
Ext. Depth Ov	verall (in.)*	233/8 (594mm)			
Ext. Height O	verall (in.)	735/8 (1870mm)			
Int. Length O	verall (in.)	19 (483mm)			
Int. Depth Ov	erall (in.)	197/8 (504mm)			
Int. Height Ov	verall (in.)	57 _{1/2} (1460mm)			
Net Weight (II	bs.)	168			
Gross Weight (lbs.)		187			
# of Shelves	Тор	3			
5. 55.766	Bottom	1			
Shelf Size (L)	(D) (in.)	203/8 x 167/8			
Bottle Capaci	ty	150 (Full) 120 (Load Line)			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


■ WARRANTY: 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor


- Anti-corrosion coated evaporator
- White color cabinet & black color frame on door
- Gravity feed shelf available (optional)

■ OPTIONAL ACCESSORIES:

- ☐ Additional PE coated wire shelf: 30278F0300
- ☐ Gravity feed shelf: 30278F0400

PLAN VIEW



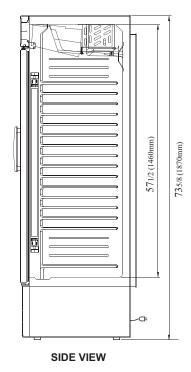

Ver.20180118
















■ Warranty: 800-381-7770 ■ AC: 888-900-1002











^{*} Depth does not include 1-3/8" for door handle.